

Specifications

DESCRIPTION

- · Available in various finishes identified by suffix
- · Fixed mount showerhead only
- Nonmetallic spray face and shell
- · Brass swivel ball assembly

FLOW


- Showerhead is limited to 2.5 gpm (9.5 L/min) max
- EP suffix models are limited to 1.75 gpm (6.6 L/min) max
- EP15 suffix models are limited to 1.5 gpm (5.7 L/min) max

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



Moenflo® XL Single Function Showerhead

Models: 6302 series



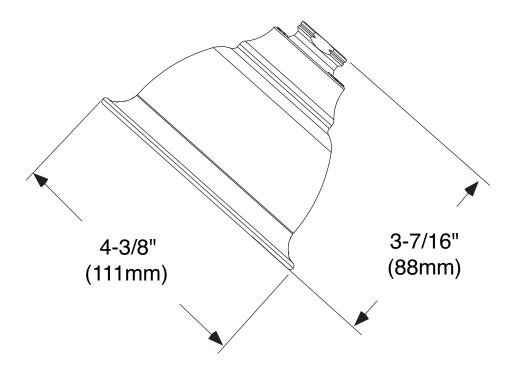

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 1/13